

TOWN OF BERRYVILLE, VIRGINIA
Invitation for Bids
Paving, Milling, and Line Striping
RFP # 2024-01

Addendum 1
Issued April 25, 2024

SUBJECT: Scope Amendment

The Scope of Work has been amended in the following manner:

- Dorsey Street has been removed from the list of streets that will be paved.
- Chamberlain Street has been added to the list of streets that will be paved.
- Freemont Court has been added to the list of streets that will be paved.

Please find attached the following:

- Amended Scope of Work
- Amended Vicinity Map

Please note that:

- Both streets that were added to the scope are located in the northwest portion of Berryville.
- Both streets that were added to the scope have been marked with white paint in the same manner as the streets reviewed at the Pre-bid conference.

Approved and Issued:



Keith R. Dalton, Town Manager

4/25/24

Date

Bidder Acknowledgement

I acknowledge that I have received and reviewed this IFB addendum.

Authorized Signature

Date

INVITATION FOR BID - PAVING, MILLING, AND LINE STRIPING

Bid Proposal Form - Scope of Work

Amended 04/25/2024

Lincoln Avenue

Item Description	Estimated Qty / Unit of Measure	Unit Price	Amount
Apply 1.5" of SM 9.5AL	Approximate length 1,000 feet		
Width of Roadway	Approximate width 24 feet		
Mill Curb Relief	Approximate length 1,000 feet		
Mill Tie-In Joints	9 (bidders must verify length (area marked with white paint))		
Stop Bars	1 (12'x2' Thermo Burn Down)		
Cross Walk	1 (replace-match existing)		
Re-establish shoulder	West side, 2' width compacted 21A or compacted millings		
Lincoln Avenue - Total			\$

Dorsey Street

Item Description	Estimated Qty / Unit of Measure	Unit Price	Amount
Apply 1.5" of SM 9.5AL	Approximate length 1,100 feet		
Width of Roadway	Approximate width 22 feet		
Stop Bars	2 (12' x2' Thermo-Burn-Down)		
Mill Tie-In Joints	6 (bidder must verify length (area marked with white paint))		
Re-establish shoulder	2' width compacted 21A or compacted millings		
Dorsey Street - Total			\$

Jack Enders Blvd. from E. Main to Marked Tie-In Joint

Item Description	Estimated Qty / Unit of Measure	Unit Price	Amount
Apply 2" of SM 9.5AL	Approximate length 700 feet		
Width of Roadway	Approximate width 36 feet		
Mill Curb Relief	Approximate length 1,400 feet		
Right Turn Arrow	1 (Thermo Burn Down) replace to match existing		
Left Turn Arrow	2 (Thermo Burn Down) replace to match existing		
Straight Arrow	1 (Thermo Burn Down) replace to match existing		
Stop Bars	2 (Thermo Burn Down) replace to match existing		
Mill Tie-In Joints	4 (bidder to verify length (area marked with white paint))		
Double Yellow Line	Approximate length 700 feet		
White Paint Line	Approximate length 340 feet		
Gore Area	1 (replace to match existing)		
Jack Enders Blvd. from E. Main to Marked Tie-In Joint - Total		\$	

Crown Street

Item Description	Estimated Qty / Unit of Measure	Unit Price	Amount
Apply 1.5" of SM 9.5AL	Approximate length 400 feet		
Width of Roadway	Approximate width 22 feet		
Mill Tie-In Joints	3 (bidders to verify length (areas marked by white paint))		
Stop Bars	2 (12' x2' Thermo Burn Down)		
Re-establish Shoulders	2' width compacted 21A or compacted millings		
Crown Street - Total		\$	

Pender Court

Item Description	Estimated Qty / Unit of Measure	Unit Price	Amount
Apply 1.5" of SM 9.5AL	Approximate length 500 feet		
Width of Roadway	Approximate width 24 feet		
Mill Curb Relief	Approximate length 50 feet		
Stop Bar	1 (12' x2' Thermo Burn Down)		
Mill Tie-In Joints	10 (bidders to verify length (area marked with white paint))		
Re-establish Shoulders	2' width compacted 21A or compacted millings		
Pender Court - Total		\$	

McGuire Circle

Item Description	Estimated Qty / Unit of Measure	Unit Price	Amount
Apply 1.5" of SM 9.5AL	Approximate length 4,275 feet		
Width of Roadway	Approximate width 27 feet		
Mill Curb Relief	Approximate length 8,550 feet		
Mill Tie- In Joints	4 (bidders to verify length (area marked by white paint))		
Stop Bars	2 (12' x 2' Thermo Burn Down)		
McGuire Circle - Total			\$

Custer Court

Item Description	Estimated Qty / Unit of Measure	Unit Price	Amount
Apply 1.5" of SM 9.5AL	Approximate length 700 feet		
Width of Roadway	Approximate width 26 feet		
Mill Curb Relief	Approximate length 1400 feet		
Mill Tie-In Joints	1 (bidders to verify length (area marked by white paint))		
Stop Bar	1 (12' x 2' Thermo Burn Down)		
Re-establish Shoulders	2' compacted 21A or compacted millings		
Custer Court - Total			\$

Edgar Court

Item Description	Estimated Qty / Unit of Measure	Unit Price	Amount
Apply 1.5 inches of SM 9.5 AL	Approximate length 320 feet		
Width of Roadway	Approximate width 22 feet		
Mill Tie-In Joints	6 (bidders to verify length (area marked with white paint))		
Stop Bar	1 (12' x 2' Thermo Burn Down)		
Crosswalk	1 (replace to match existing)		
Edgar Court - Total			\$

Early Drive

<u>Item Description</u>	<u>Estimated Qty / Unit of Measure</u>	<u>Unit Price</u>	<u>Amount</u>
Apply 1.5 inches of SM 9.5 AL	Approximate length 800 feet		
Width of Roadway	Approximate width 36 feet		
Mill Curb Relief	Approximate length 1700 feet		
Stop Bar	1 (12' x 2' Thermo Burn Down)		
Mill Tie-In Joints	1 (bidders to verify length (area marked with white paint))		
Repaving of hammerhead turnaround included in scope of work- southern street terminus			
Early Drive - Total			\$

Chamberlain Street

<u>Item Description</u>	<u>Estimated Qty / Unit of Measure</u>	<u>Unit</u>	<u>Amount</u>
Apply 1.5 inches of SM 9.5 AL	Approximate length 380 feet		
Width of Roadway	Approximate width 32 feet		
Mill Curb Relief	Approximate length 760 feet		
Mill Tie-In Joints	4 (bidders to verify length (area marked with white paint))		
Chamberlain Street - Total			\$

Fremont Court

<u>Item Description</u>	<u>Estimated Qty / Unit of Measure</u>	<u>Unit</u>	<u>Amount</u>
Apply 1.5 inches of SM 9.5 AL	Approximate length 700 feet		
Width of Roadway	Approximate width 24 feet		
Mill Curb Relief	Approximate length 100 feet		
Mill Tie-In Joints	17 (bidders to verify length (area marked with white paint))		
Stop Bar	1 (12' x 2' Thermo Burn Down)		
Crosswalk	1 (replace-match existing)		
Re-establish Shoulders	2' compacted 21A or compacted millings		
Fremont Court - Total			\$

Unit Pricing

Item Description	Unit of Measure	Unit Price	Amount
Mill Tie-in Joints	Square Yard		
Mill Curb Relief	Square Yard		
Apply 1.5 inches of SM 9.5AL	Square Yard		
Apply 2 inches of SM 9.5AL	Square Yard		
Double Yellow Line Striping with VDOT approved paint	1 Linear Foot		
White Line Striping with VDOT approved paint	1 Linear Foot		
"SCHOOL" Lettering (Thermo Burn Down)	Meet VDOT standard for streets posted for 25 MPH		
Left Turn Arrow (Thermo Burn Down)	Meet VDOT standard for streets posted for 25 MPH		
Right Turn Arrow (Thermo Burn Down)	Meet VDOT standard for streets posted for 25 MPH		
Straight Arrow (Thermo Burn Down)	Meet VDOT standard for streets posted for 25 MPH		
Combo Straight Right Turn Arrow (Thermo Burn Down)	Meet VDOT standard for streets posted for 25 MPH		
Stop Bars (Thermo Burn Down)	1 Linear Foot		
Stone Shoulders (21B)	1 Square Foot		
Cross Walks (Thermo Burn Down)	1 Linear Foot		
Unit Pricing - Total		\$	

GRAND TOTAL - SCOPE OF WORK \$

In compliance with this Invitation For Bids (IFB) and all conditions imposed in this IFB, the undersigned firm hereby offers and agrees to furnish all goods and services in accordance with the attached signed bid or as mutually agreed upon by subsequent negotiation, and the undersigned firm hereby certifies that all information provided below and in any schedule attached hereto is true, correct, and complete. The undersigned firm also acknowledges that work area dimensions provided in this scope of work are approximated and it is their responsibility to measure all work areas and complete bid in accordance with their measurements.


Name and Address of Firm: _____

Authorized Representative (Please Print): _____

Signature: _____

Title: _____

Date: _____

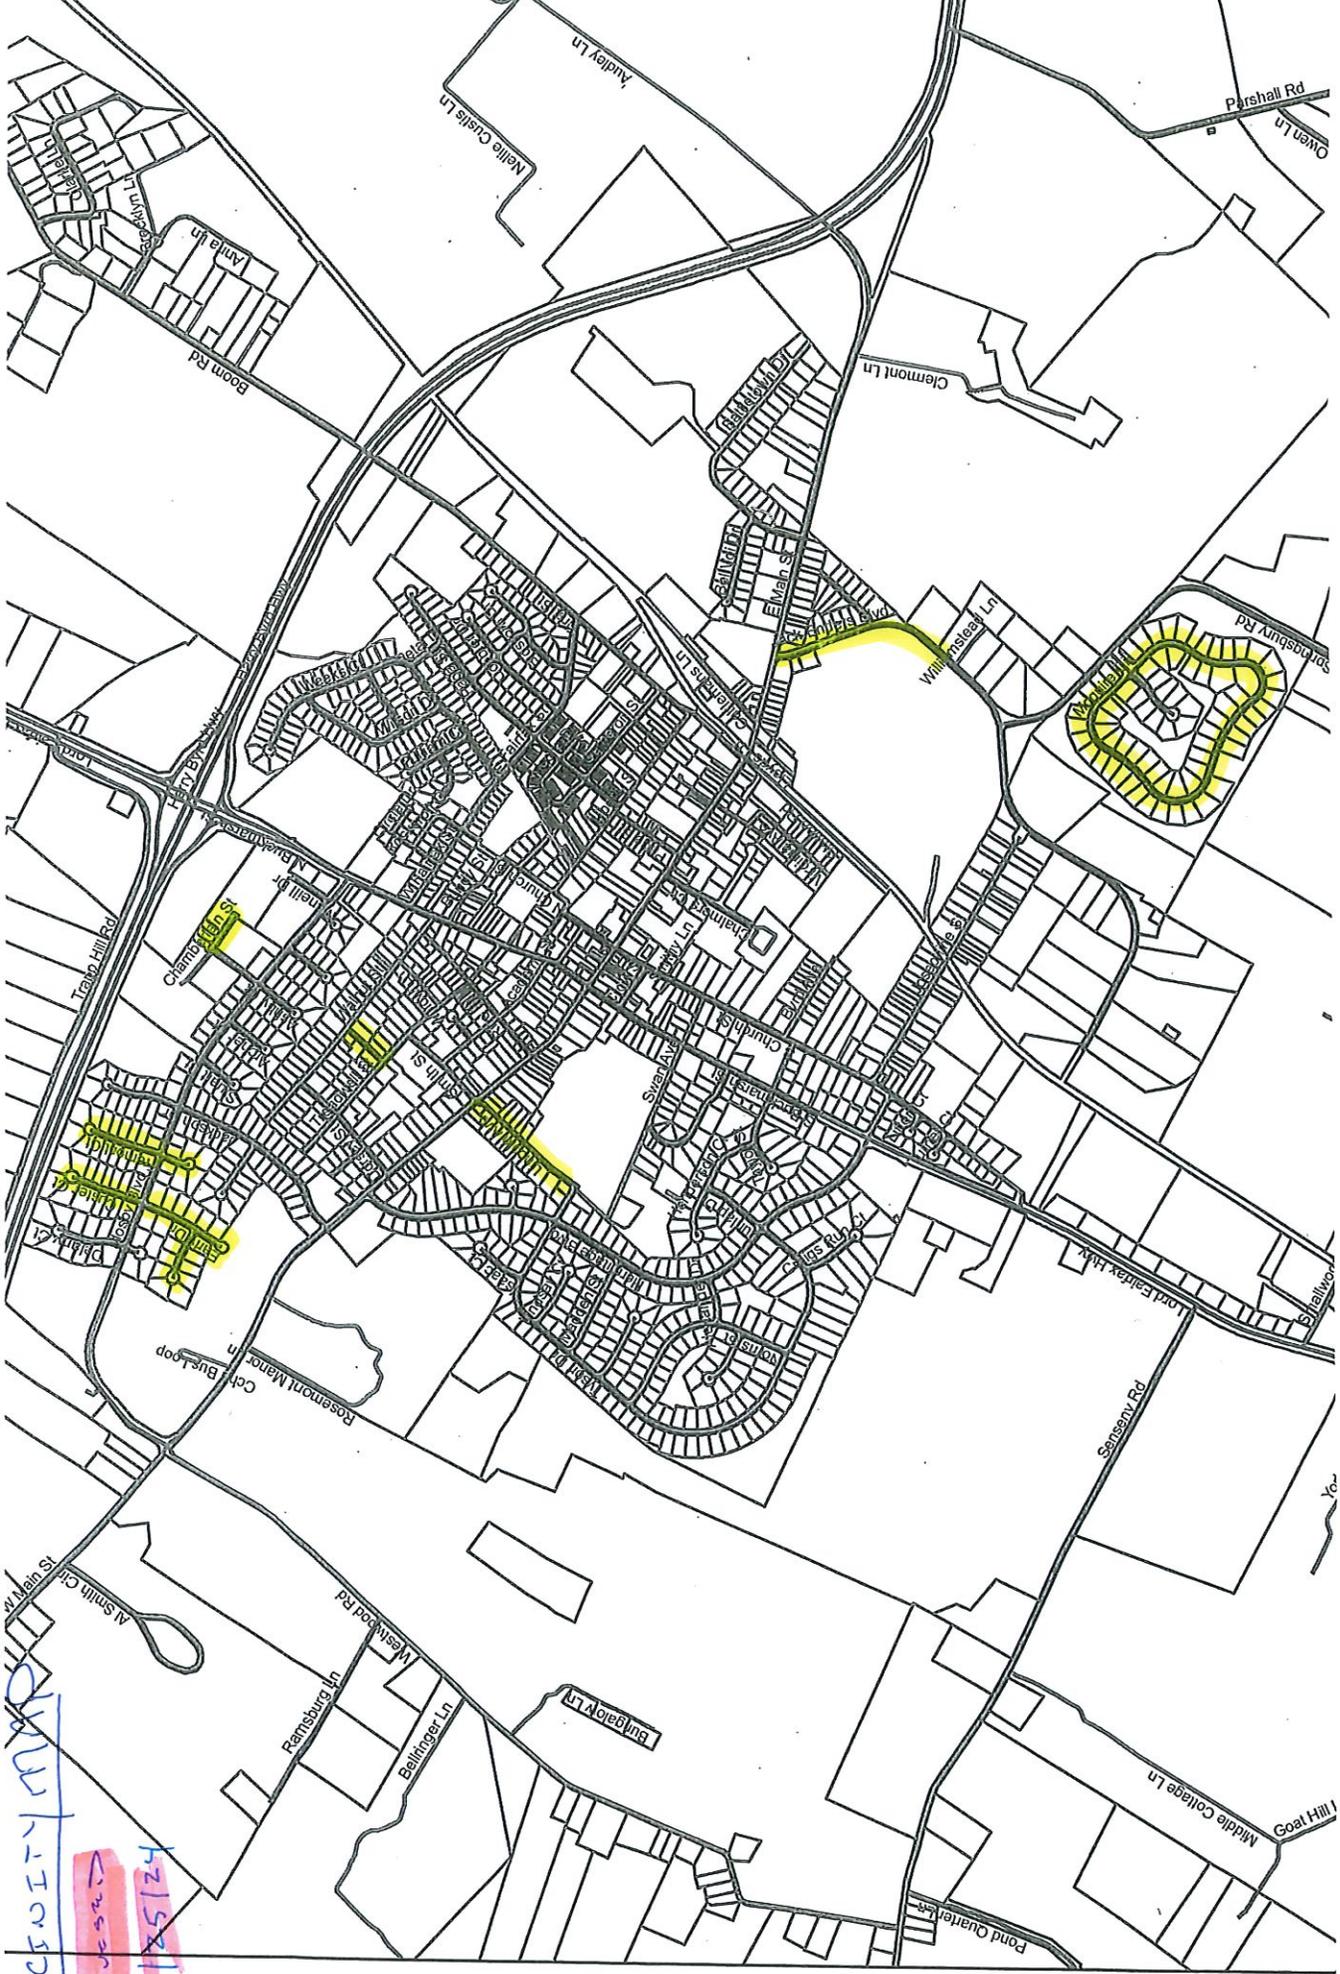

VELOCITY MAP
R23332
4125114